



LED Panels



RoHS




Lifetime

L90 @ 43,000 hrs
L70 @ 54,000 hrs



5 Year
Limited
Warranty

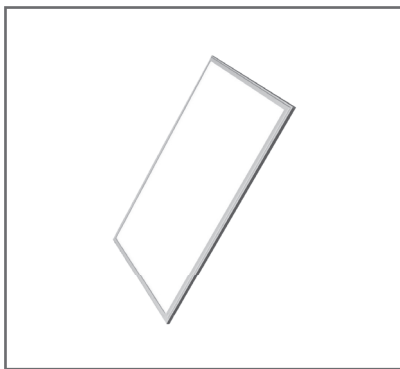

FEATURES

- Extremely Balanced and Well Distributed Lighting
- Installation: Suspension Cable, Ceiling Mounting Panel, Ceiling Recessed
- Instant on to Full Brightness
- CRI > 80
- Power factor > 0.97
- LED Viewing Angle: 120°
- Aluminium Base for Good Heat Dissipation

| PRODUCT FAMILY | SIZE (ft) | POWER (Watts) | VOLTAGE (VAC) | LUMENS* (lm) | DIMM. | C.C.T. (Kelvin) | DLC VERSION | DLC CLASSIFICATION | MODEL NUMBER | | | | |
|----------------|-----------|---------------|---------------|--------------|-------|-----------------|-----------------------|--------------------|------------------|--------------|-----|----------|-----------------------|
| LED PANELS | 1 x 4 | 40 | 100-277 | 4,240 | Yes | 3K, 4K 5K | 4.4 | STANDARD | AMI-14-40D-SYYYY | | | | |
| | | | | 5,120 | | | | PREMIUM | AMI-14-40D-PYYYY | | | | |
| | 2 x 2 | | | 4,240 | | | | STANDARD | AMI-22-40D-SYYYY | | | | |
| | | | | 5,120 | | | | PREMIUM | AMI-22-40D-PYYYY | | | | |
| | 2 x 4 | 50 | | 5,150 | | | | STANDARD | AMI-24-50D-SYYYY | | | | |
| | | | | 6,400 | | | | PREMIUM | AMI-24-50D-PYYYY | | | | |
| | 1 x 4 | 40 | | 120/347 | | | | 4,240 | Yes | 3K, 4K 5K | 4.4 | STANDARD | AMI-14-347V-40D-SYYYY |
| | | | | | | | | 5,000 | | | | PREMIUM | AMI-14-347V-40D-PYYYY |
| | | | 2 x 2 | | 4,240 | STANDARD | AMI-22-347V-40D-SYYYY | | | | | | |
| | | | | | 5,000 | PREMIUM | AMI-22-347V-40D-PYYYY | | | | | | |
| | | 2 x 4 | 50 | | 5,000 | STANDARD | AMI-24-347V-50D-SYYYY | | | | | | |
| | | | | | 6,250 | PREMIUM | AMI-24-347V-50D-PYYYY | | | | | | |

* Delivered Lumens